

Муфта зубчатая



KOD	КОЛ-ВО в упаковке
14 DC (PL)	-
14 DC (CL)	-
24 DC	30
28 DC	20
32 DC	20
38 DC	15
42 DC	15
48 DC	12
55 DC	6
60 DC	4

Муфта зубчатая (удлиненная)


KOD
14 DC (PL)
14 DC (CL)
24 DC
28 DC
32 DC
38 DC
42 DC
48 DC
55 DC
60 DC

Муфта зубчатая (расточенная)



KOD	КОЛ-ВО в упаковке	ПОМПА	ДВИГАТЕЛЬ
14 DC (CL)	-	OP1	14
24 DC	30	OP1 - 1P1	14 - 19 - 24
28 DC	20	OP1 - 1P1 - 2P1	14 - 19 - 24 - 28
32 DC	20	1P1 - 2P1	19 - 24 - 28
38 DC	15	1P1 - 2P1	24 - 28 - 38
42 DC	15	1P1 - 2P1	24 - 28 - 38 - 42
48 DC	12	1P1 - 2P1	28 - 38 - 42 - 48
55 DC	6	1P1 - 2P1	38 - 42 - 48 - 55
60 DC	4	1P1 - 2P1	42 - 48 - 55 - 60

KOD	ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ												KW	HP	
	A	A1	B	F	E	C	G	МОТОР (D)				ПОМПА (P)			
14 DÇP	44	40	33	23	21	28	1	-	-	-	-	-	-	0,25-0,37	0,35-0,50
14 DÇ	51	40	33	24	24	28	3	-	-	-	14	0P1	1P1	0,25-0,37	0,35-0,50
24 DÇ	58	54	44	35	28	34	2	-	14	19	24	0P1	1P1	1.1-1.5	1,5-2
28 DÇ	82	68	56	45	40	40	2	14	19	24	28	1P1	2P1	2,2-4	3-5,5
32 DÇ	83	76	59	49	40	45	3	-	19	24	28	1P1	2P1	2,2-4	3-5,5
38 DÇ	85	84	68	57	42	48	2	-	24	28	38	1P1	2P1	5,5-7,5	7,5-10
42 DÇ	86	88	71	60	42	50	2	24	28	38	42	1P1	2P1	11,-5	15-20
48 DÇ	100	100	78	65	47	51	3	28	38	42	48	1P1	2P1	18,5-22	25-30
55 DÇ	114	120	98	85	55	63	3	38	42	48	55	1P1	2P1	30	40,00
60 DÇ	138	140	111	98	68	71	2	42	48	55	60	1P1	2P1	37-45	50-60

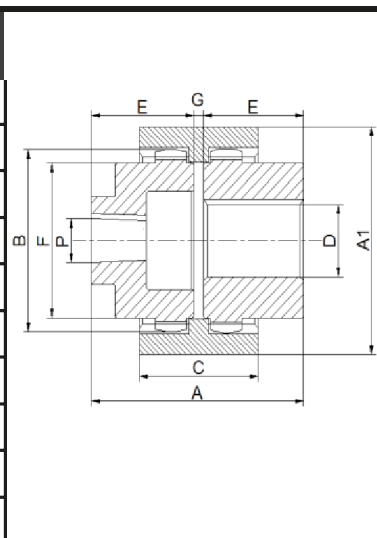


Кулачковая муфта



KOD	КОЛ-ВО в упаковке
65 YK	20
80 YK	15
95 YK	12
110 YK	6
125 YK	6
140 YK	4
160 YK	4
180 YK	2
200 YK	2
225 YK	1
250 YK	1

Цепная муфта КС

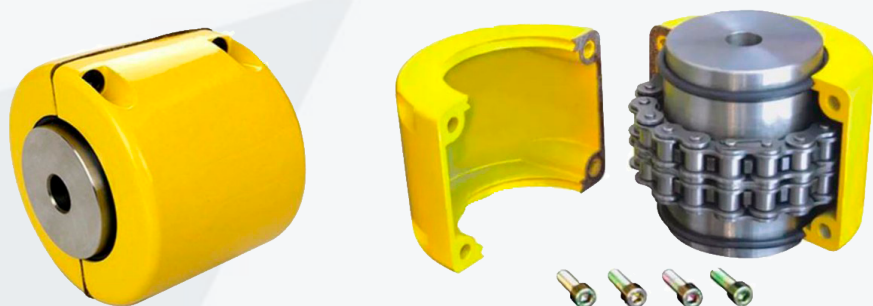

KOD	КОЛ-ВО в упаковке
КС 4012	
КС 4014	
КС 4016	
КС 5014	
КС 5016	
КС 5018	
КС 6018	
КС 6020	
КС 6022	
КС 8018	
КС 8020	
КС 8022	
КС 10020	
КС 12018	
КС 12022	